

TRP upstands

VELUX®
Commercial


For trapezoidal and corrugated sheets – customised for profiled roofs

TRP upstands

- precise fitting for easy and weather-tight installation in sheet metal roofing or fibre cement constructions
- suitable for any type of existing roof profile
- single-ply or with thermally insulated foot flange for ISO/thermo roofs
- form-fitting assembly due to true-to-size aligned profiling
- problem-free water drainage via ridge-integrated channeling
- assembly takes place in the course of the placement of roof elements on the customer's revolving and load-bearing exchanges
- ideal for use in less heated, insulated buildings, such as storage or production facilities



Steel aluminium integrated TRP RAK upstand 30 cm high with SHEV dome rooflight



GRP AK for corrugated profile 30 cm high with TOP-90 dome rooflight

1.1.1
TOP-90

1.1.2
TOP-90 PLUS

1.4.1
Dome rooflight
safety concept

1.4.5
LK-DDS

1.4.6
LK-DDN

Application possibilities of the TRP dome rooflight upstands

		Connection to the roof sealing	
		Trapezoidal respectively corrugated profiles	ISO roof
GRP AK with TRP-slanted sides ¹	15, 30, 50	•	•
GRP RAK with TRP-slanted sides ¹	30	•	•
GRP TRP RAK	30	•	
GRP RAK corrugated profile	25, 30	•	
GRP AK corrugated profile	20, 30	•	
GRP aluminium integrated TRP RAK ²	30	•	
GRP aluminium integrated TRP AK ²	15, 30, 50	•	
Steel aluminium integrated AK with TRP-slanted sides ³	30	•	•
Steel aluminium integrated RAK with TRP-slanted sides ³	30	•	•
Steel aluminium integrated TRP AK	30	•	
Steel aluminium integrated TRP RAK	30	•	
Aluminium TRP AK	15, 30	•	
Aluminium TRP RAK	30	•	
Aluminium thermal TRP AK	15, 30	•	•
Aluminium thermal TRP RAK	30	•	•

- applicable

Note:

1) see also brochure 1.2.4

2) see also brochure 1.2.6

3) see also brochure 1.2.5

GRP TRP upstands

- TRP profiled flange, 30 cm high, for highly effective smoke exhaust in RAK geometry
- GRP upstands are available in most RAL colours

GRP upstands for corrugated profiles

- for fibre cement corrugated roofing (FZW) with revolving factory-laminated connection flange for profile FZW 5 or FZW 8
- upstand height depends on profile and order size
- GRP upstands are available in most RAL colours

Aluminium TRP upstands

- thermally insulated reveal with single-ply TRP profiled flange

Steel aluminium integrated TRP upstands

- thermally separated, inside made of steel and outside made of aluminium;
for SHEV type RAK: heat insulation: 30 mm,
for type AK: heat insulation: 60 mm

Aluminium thermal TRP upstands



- thermally insulated reveal and TRP profiled flange

Standard sizes fix or openable

Order sizes	GRP TRP RAK 30	GRP corrugated profile				Steel aluminium integrated TRP		Aluminium TRP AK 15/30	Aluminium TRP RAK 30	Aluminium thermal AK 15/30	Aluminium thermal RAK 30
		AK 20	AK 30	RAK 25	RAK 30	AK 30	RAK 30				
cm x cm		AK 20	AK 30	RAK 25	RAK 30	AK 30	RAK 30				
50 x 100								•		•	
50 x 150								•		•	
60 x 60		•						•		•	
60 x 90		•						•		•	
80 x 80								•		•	
90 x 90			•			•		•		•	
90 x 120						•		•		•	
100 x 100			•		•	•	•	•	•	•	•
100 x 150						•	•	•	•	•	•
100 x 200			•			•	•	•	•	•	•
100 x 240						•	•	•	•	•	•
100 x 250						•	•	•	•	•	•
100 x 300						•		•	•	•	•
120 x 120	•		•		•	•	•	•	•	•	•
120 x 150						•	•	•	•	•	•
120 x 180						•	•	•	•	•	•
120 x 210						•	•	•	•	•	•
120 x 240	•					•	•	•	•	•	•
120 x 250						•	•	•	•	•	•
120 x 270						•		•	•	•	•
125 x 250						•	•	•	•	•	•
140 x 200				•					•		•
150 x 150	•		•		•	•	•	•	•	•	•
150 x 180						•	•	•	•	•	•
150 x 210						•	•	•	•	•	•
150 x 240						•	•	•	•	•	•
150 x 250						•	•	•	•	•	•
150 x 270						•		•	•	•	•
180 x 180						•	•	•	•	•	•
180 x 240						•	•	•	•	•	•
180 x 250	•				•	•	•	•	•	•	•
180 x 270						•		•	•	•	•
200 x 200						•	•	•	•	•	•

• = applicable

Assembling hints

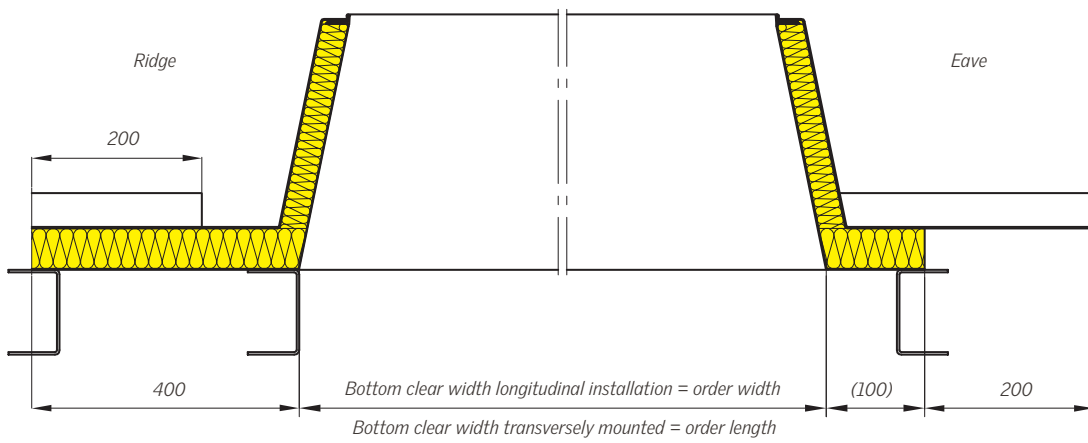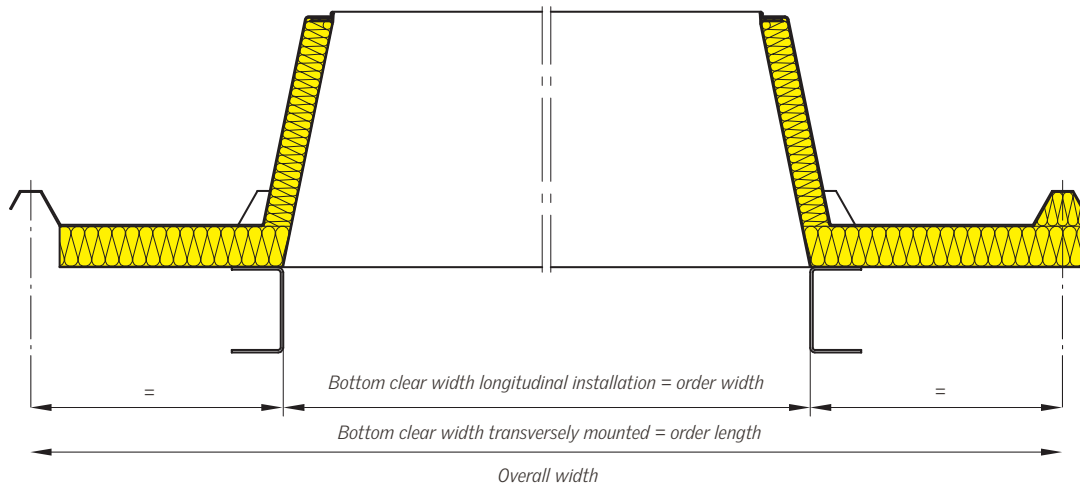

Valid from date of publication until new edition. Version: July 2022. Not responsible for printing errors, mistakes and technical alterations.